

## FLANGED INLET AND OUTLET WIRING INSTRUCTIONS


### **WARNING:**

**To prevent electrocution, make sure power is off, and cannot be turned back on while installing the inlets or outlets.**

**Devices must be installed by a qualified electrician.**

**Failure to comply with the following instructions could cause an electrical failure or fire.**

- Make sure the inlet or outlet has the proper electrical rating for the system on which it is being installed.
- Wire size and type must comply with appropriate local electrical codes. The inlet or outlet is designed for #12 through #16 AWG.
- Strip the wire insulation 9/16".
- Use copper wire only. Make sure the wire is clean, and a bright copper color.
- Do not solder the ends of the wire.
- Insert each wire into the appropriate wire terminal. Make sure there is no wire insulation in any terminal, and tighten the terminal screws to 12 inch-pounds torque. **Do not overtighten.**

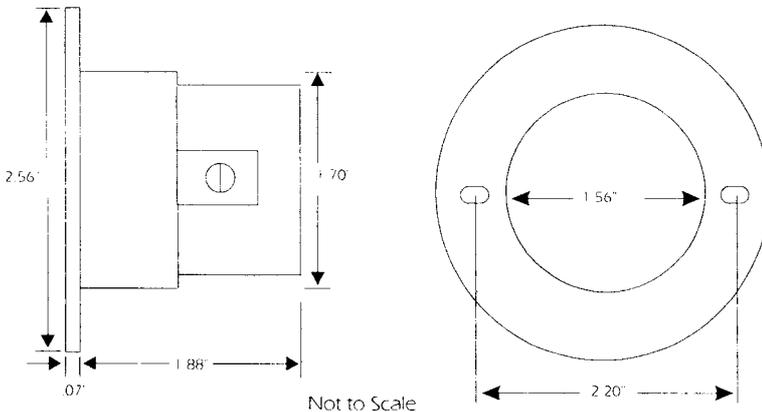

# MARLNCO

2655 Napa Valley Corp Dr., Napa CA 94558 707-226-8600 Fax: 707-226-9670