

# 15A and 20A Plugs and Connectors

## Wiring Instructions



**Warning:** To prevent electrocution, make sure the cable is not connected to a power source before installing a plug or connector.

**Failure to comply with the following instructions could cause an electrical failure or fire.**


**1. Cable Selection:** Select a cable of suitable capacity, service and temperature rating (see NEC Article 400). The plugs and connector are designed for use with 3-wire cable with a diameter from .300" to .655" (18/3 SJ through 12/3S).

**2. Device Preparation:** Check to see that the rating on the plug or connector is correct for the installation. Remove the body of the device from the housing by loosening the two assembly screws.

If the cord is 14/3 S or 12/3 S, Knock out the cord clamp insert from inside the housing. Cords larger than .500" (14/3 S or 12/3 S) will not fit through the housing unless the cord clamp insert is removed.

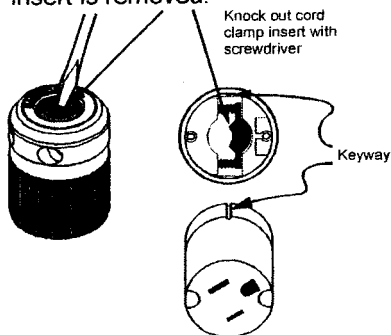

**3. Cable Preparation:** Select the proper end of the cord for the plug or connector. Feed the cable through the housing and strip the cord as shown. Make sure the wire is clean, and a bright copper color. If necessary, cut back the wire until clean wire is uncovered. Do not solder the ends of the wire.

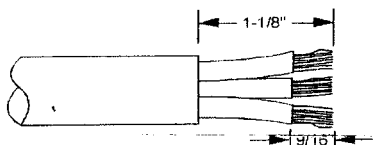

**4. Assembly:** Insert all the wires into the proper terminal pockets. The green wire must go into the terminal with the green colored screw (also marked "GR"). The white wire must go into the terminal with a brass, or black colored screw.

Make certain there is no wire insulation clamped inside any terminal, and there are no stray wire strands outside the terminals. Tighten the terminal screws to 12 in-lbs torque. Do not overtighten.

Slide the housing over the device body. Note that the keyway in the housing and the body properly aligns the two parts. Alternately tighten the cord clamp screws to 8-10 in-lbs torque. Tighten the device assembly screws.

**MARINCO®**

2655 Napa Valley Corporate Drive  
Napa, CA 94558  
(707) 226-8600 Fax (707) 226-9670

102209 06/02